


安装说明书 instruction for installation

适用制冷剂 Applicable refrigerant:
R134a/R22/R407C/R410A

最大工作压力 MWP:
2.8MPa~4.2MPa

适用流体温度
Applicable fluid temperature
: -40 °C~+150°C

外形图 outside view:

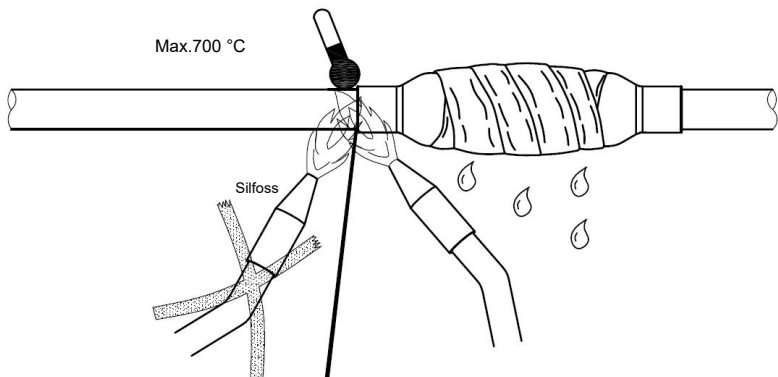

1. 钎焊作业需要有专业焊接人员进行操作。

Brazing operations require professional welding personnel to operate

2. FDM 系列单向阀可同时用于水平安装和垂直安装。

The FDM series check valves can be used for both horizontal and vertical mounting

3. 钎焊时，需用可滴水的湿布包裹阀身，防止阀身过热。

When brazing, the valve body should be wrapped with a wet cloth that can drop water to prevent the valve body from overheating

4. 焊接时，请勿将火焰朝向阀身。

When welding, do not direct the flame towards the valve body

5. 如遇超范围使用状况，请咨询 Dunan 公司技术支持或营销人员

In case of out-of-range use, please consult Dunan technical support or marketing personnel.